

PCS Anti-Corrosion Tape

PCS Anti Corrosion Tape stops dangerous corrosion and provides many years of maintenance-free operation of hydraulics, pipes and equipment.

SPECIFICATIONS:


- Tested to IEC 60331-21 and IEC 60332-3-22
- Chemically inert, does not polymerize or oxidize
- Free of chemical impurities
- Repels water, salt, alkalis and acids
- Temperature range: -45C to 65C
- Applications can be on already corroded or new installations.



APPLICATIONS:

- Hydraulic pipes, valves and fittings
- Steel pipes, flanges and fittings
- Electrical conduit pipes and boxes

APPLICATION INSTRUCTIONS:

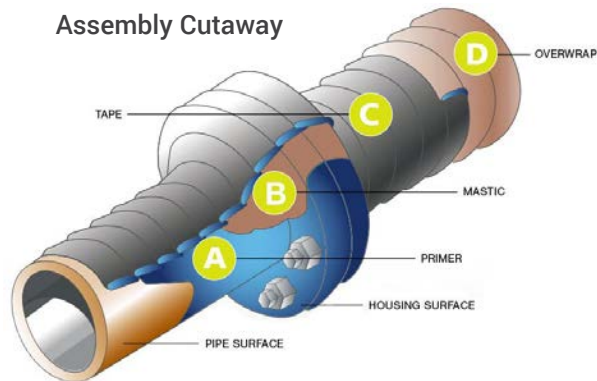

1. Remove all loose scale, rust or other foreign agents.
2. Apply PCS Primer, making sure you displace oxygen and moisture from surface.
3. Apply PCS Mastic on uneven surfaces making sure that you don't create air pockets.
4. Spirally wrap PCS Tape with a minimum of 55% overlap to assure full protection.
5. While wrapping, press air pockets out and smooth all lap seams.
6. Apply PCS Overwrap for areas that may require mechanical protection.

ORDERING INFORMATION:

PCS Tape				
IMPA Code	81 24 71	81 24 72	81 24 73	81 24 74
WWM Item #	F812471	F812472	F812473	F812474
Width	50mm (2")	100mm (4")	150mm (6")	200mm (8")
Length	10m (32.8')			
Rolls/Carton	36	18	12	8
Weight/Box	55 lb. (25 kg)			

PCS Primer Paste	
IMPA Code	81 24 81
WWM Item #	F812481
Weight/Box	4 x 4 kg / box

PCS Mastic	
IMPA Code	81 24 83
WWM Item #	F812483
Weight/Box	36 x 0.5 kg / box

