



B 10 11


185/001 M

GOMITO MISTO 90° MF CON DISTANZIALE

- EXTENSION WALL PLATE ELBOW 90° MF
- DECKENWINKEL 90°/W A/I
- EQUERRE 90° MF AVEC SUPPORT D'AVANCEMENT
- CODO PLACA MH CON ESPACIADOR

MATERIAL: AISI 316L – 1.4404
THREAD: EN 10226-1 (ex ISO 7/1)

CODE	De x R mm x inch	L1 mm	L2 mm	Z1 mm	Z2 mm	A mm	B mm	D mm			
185102115M	15 x 1/2"	52	30	21	16,5	34	35	5	135	10	150
185102118M	18 x 1/2"	52	30	21	16,5	34	35	5	130	10	150
185304122M	22 x 3/4"	55	34	24	19	40	31	6	166	10	100


B 10 11

185/003

RACCORDO TRE VIE CON FLANGIA E DERIVAZIONE FILETTO F

- CORNER TEE WITH WALL FLANGE
- INOXPRES-DOPPELWANDSCHEIBE
- EQUERRE MURALE AVEC FILETAGE FEMELLE
- RACOR TRES VÍAS CON BRIDA Y ROSCA HEMBRA

MATERIAL: AISI 316L – 1.4404
O-RING: EPDM nero - black - Schwarz - noir - negro
THREAD: EN 10226-1 (ex ISO 7/1)

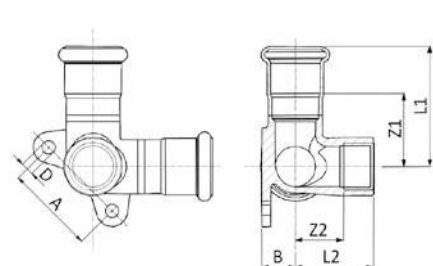

CODE	De x R mm x inch	L1 mm	L2 mm	Z1 mm	Z2 mm	A mm	B mm	D mm			
185102315	15 x 1/2"	52	32	32	18,5	40	13	6	173	10	100
185102318	18 x 1/2"	52,5	32	32,5	18,5	40	13	6	182	10	50
185102322	22 x 1/2"	53,5	35	32,5	21,5	40	15	6	206	5	50


≤54 B 10 11
76÷108 B 10 12

187/R

MEZZO MANICOTTO A SALDARE

- HALF WELDING COUPLING
- HALBE LAENGE SCHWEISSMUFFE
- DEMI MANCHON À SOUDER
- MEDIO MANGUITO PARA SOLDAR

MATERIAL: AISI 316L – 1.4404
O-RING: assente - absent - Abwesend - absent - ausente



CODE	De mm	L mm	Z mm	D mm			
187015000R	15	29	9	17,2	20	20	400
187018000R	18	29,5	9,5	20	24	20	300
187022000R	22	30,5	9,5	24	30	20	200
187028000R	28	33,5	10,5	30	40	10	200
187035000R	35	37,5	11,5	37	52	10	100
187042000R	42	41	11	44	74	10	50
187054000R	54	48	12	56	104	10	50
187076000R	76,1	74,5	19,5	76,1	308	4	24
187088000R	88,9	84	24	88,9	404	2	20
187108000R	108	100	25	108	614	1	4