**679/001 CN**

≤54 B 80 81

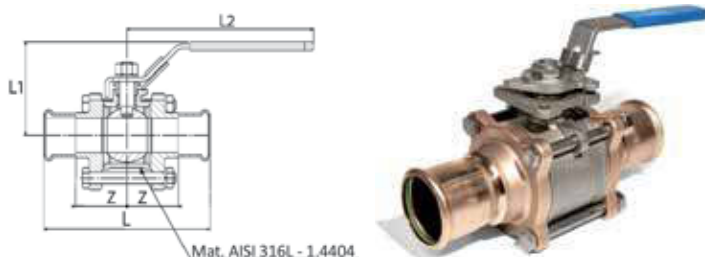
76÷108 B 80 82

PASSAGGIO STAGNO

- DECK / BULKHEAD PENETRATION
- WANDDURCHFÜHRUNG
- PASSAGE ÉTANCHE
- PASAJE ESTAÑO

MATERIAL: CuNi10Fe1.6Mn**NOTE:** [*]: S235JR [Fe 360]

CODE	De mm	L mm	L1 mm	Z mm	D mm	D1 mm		
679015001CN	15	450	120	165	25	15	513	1
679018001CN	18	450	120	165	30	18	693	1
679022001CN	22	450	120	165	33	22	782	1
679028001CN	28	450	120	165	37	28	865	1
679035001CN	35	450	120	165	43,5	35	1044	1
679042001CN	42	450	120	165	53	42	1440	1
679054001CN	54	450	120	165	69	54	2192	1
679076001CN	76,1	450	120	165	88,5	76,1	3167	1
679088001CN	88,9	450	120	165	107	88,9	4551	1
679108001CN	108	450	120	165	131,5	108	6337	1

**695/003 CN**

≤54 B 80 81

76÷108 B 80 82

VALVOLA A SFERA 3 PZ PASSAGGIO TOTALE LUCCHETTABILE CON BASE PER ATTUATORE

- 3-PC BALL VALVE WITH FULL PORT
- KUGELHAHN 3-TEILIG MIT VOLLEM DURCHGANG
- BOISSEAU SPHERIQUE 3 PIÈCES PASSAGE INTÉGRAL
- VALVULA DE BOLA TRES PIEZAS POSO TOTAL

MATERIAL: CuNi10Fe1.6Mn [corpo/body AISI 316L - 1.4404]**O-RING:** FKM verde - green - Grün - vert - verde

CODE	DN	De mm	DN inch	L mm	Z mm	L1 mm	L2 mm		
695015003CN	10	15	3/8"	128	44	69	145	690	1
695018003CN	15	18	1/2"	134	47	69	145	700	1
695022003CN	20	22	3/4"	151	54,5	76	145	1000	1
695028003CN	25	28	1"	167	60,5	89	175	1460	1
695035003CN	32	35	1" 1/4	184	66	93,5	175	2260	1
695042003CN	40	42	1" 1/2	207	73,5	103	195	3080	1
695054003CN	50	54	2"	245	87,5	109	195	4520	1
695076003CN	65	76,1	2" 1/2	334	112	147	295	9100	1
695088003CN	80	88,9	3"	384	132	154	295	13300	1
695108003CN	100	108	4"	470	160	205	400	24700	1

Le condizioni stampigliate sono relative al corpo della valvola. La pressione massima di lavoro delle valvole art. 695/003 CN = 16 bar. Con flangia per attuatore.

The marked pressure's conditions are related to the body of the valve. Maximum working pressure for pressfitting valve art. 695/003 CN = 16 bar. With flange for actuator.

Die markierte Konditionen der Pressfitting entsprechend den Kugelhahnkörper. Maximaler Arbeitsbetriebsdruck für Kugelhahn 695/003 CN = 16 bar. Mit Flansch für Stellantrieb.

Les conditions de pressions indiquées sur la presse vannes correspondent au corps de vanne. Pression de service maximale des vannes 695/003 CN = 16 bar. Avec bride pour actuateur.

Condiciones de presión marcadas están relacionadas con el cuerpo de la válvula. La presión máxima de trabajo de las válvulas art. 695/003 CN = 16 bar. Con brida para actuador.